


ET 型 磁芯

ET CORES

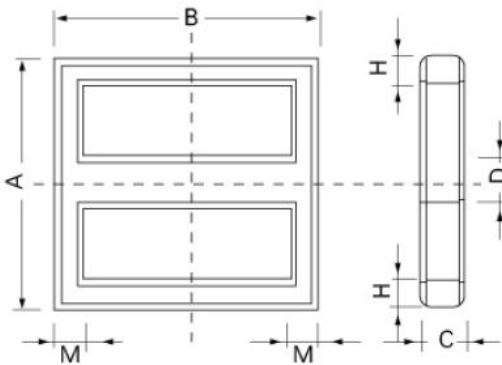

1

型号 Type	尺寸 Dimension(mm)							重量 (g)
	图例	A	B	C	D	H	M	
ET20	1	20.10±0.50	20.10±0.50	4.4±0.3	3.9±0.3	2.0±0.20	2.0±0.20	4.5
ET20-1	1	20.10±0.50	20.10±0.50	5.4±0.3	4.0±0.2	2.0±0.20	2.0±0.20	5.5
ET2022	1	20.30±0.50	21.70±0.50	5.4±0.3	4.0±0.2	2.0±0.20	2.0±0.20	5.8
ET22	1	23.50±0.50	22.00±0.30	3.5±0.2	3.8±0.1	2.2±0.15	2.2±0.15	4.8
ET24	1	24.50±0.50	24.50±0.50	4.0±0.3	4.0±0.3	2.4±0.15	2.4±0.15	6.1
ET25	1	24.60±0.30	24.80±0.30	7.0±0.2	6.9±0.2	2.5±0.15	2.5±0.15	13
ET26	1	26.00±0.40	26.00±0.40	4.5±0.3	4.5±0.3	2.5±0.15	2.5±0.15	6.5
ET28	1	28.45±0.55	28.45±0.55	5.0±0.3	5.0±0.3	2.9±0.20	2.9±0.20	10
ET29	1	29.00±0.30	30.00±0.30	5.0±0.3	5.0±0.3	2.9±0.20	2.9±0.20	10.5
ET35	1	35.30±0.60	35.30±0.60	7.5±0.3	7.3±0.3	4.0±0.20	4.0±0.20	25.1

磁环高度可根据客户要求调整

The height can be adjusted as customers' requirement

型号 Type	有效参数 Effective parameter				AL 值 AL(nH/N2)			
	C1 (mm-1)	Le (mm)	Ae (mm2)	Ve (mm3)	GH5	GH7	GH10	GH12
ET20	2.96	52.1	17.6	917	2000±25%	2700±25%	3600±25%	4400±25%
ET20-1	2.34	50.58	21.6	1092			5500±25%	
ET2022	2.39	50.5	21.1	1066			5600±25%	
ET22	5	66.6	13.5	899	1700±25%	2000±25%	3000±25%	3500±25%
ET24	3.42	61	17.8	1090	2000±25%	2700±25%	3600±25%	4400±25%
ET25	3.24	63	20	1400	2500±25%	3000±25%	4000±25%	4600±25%
ET26	3.12	66	21.1	1395	2200±25%	2800±25%	3600±25%	4000±25%
ET28	2.61	71.4	27.4	1950	2600±25%	3600±25%	4500±25%	5400±25%
ET29	2.67	74.5	27.9	2070	2600±25%	3600±25%	4500±25%	5400±25%
ET35	1.48	86.7	58.6	5080	4000±25%	5000±25%	6400±25%	8500±25%

注意：AL 值

◆单位：nH / N 2

◆测量条件：1kHz , 0.3V , 10Ts , 25°C±3°C

◆公差：±25% (GH10 , GH12 : ±30%)

以上产品的材质，可以根据客户的要求进行调整，我司可以供应 GP4/GP44/GP47/GP95 等材质。