

OT型 磁环

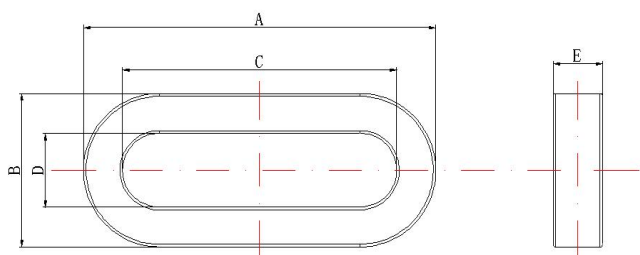


图1

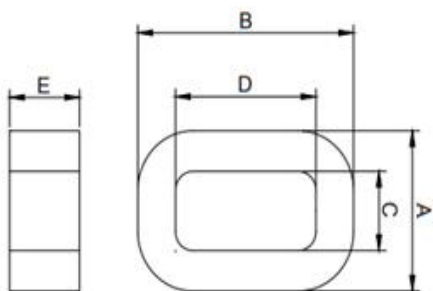


图2

	尺寸 Dimension(mm)						Weight(g)
		A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	
跑道型 (外型如图1)	OT28	28.0±0.4	20.2±0.5	15.0±0.5	7.2±0.5	5.0±0.3	≈9.5
	OT63	63.0±1.2	30.5±0.6	48±1.2	15.5±0.6	12.1±0.25	≈58.4
	OT12.2	12.2±0.3	8.2±0.3	8.3±0.3	4.3±0.3	3.75±0.2	≈1.0
	OT73.5	73.5±1.0	40.5±0.8	62.5±1.0	29.5±0.8	10.0±0.3	≈46.9
	OT106.5	106.5±2.0	40.5±2.0	95.5±2.0	29.5±2.0	10.0±0.3	≈65.0
	OT135	135.0±2.0	58.0±2.0	105.0±2.0	28.0±2.0	19.0±2.0	≈420
口字型 (外型如图2)	OT35	19.0±0.4	35.0±0.5	13.0±0.4	29.0±0.5	8.0±0.3	≈10.5
	OT37	25.5±0.55	37.0±0.7	12.6±0.4	24.1±0.55	12.0±0.3	≈34

	有效参数Effective parameter					AL值 AL(nH/N2)		
		C1(mm ⁻¹)	Ae(mm ²)	Le(mm)	Ve(mm ³)	GH5	GH7	GH10
跑道型 (外型如图1)	OT28	1.82	32.18	58.64	1887.04	3300	4200	6000
	OT63	1.57	87.3	137	11985	4700	6000	8500
	OT12.2	3.97	6.96	27.64	492.37	2300	3000	4300
	OT73.5	3.65	55	201.27	11070.3	-	-	2600
	OT106.5	4.85	55	267.27	14700.3	-	-	2000
	OT135	1.04	280.62	291.09	84685.7	6000	7500	11000
口字型 (外型如图2)	OT35	3.9	23.29	9.85	2115.89	1700	2200	3200
	OT37	1.21	77.4	93.6	7249.5	6500	8200	11800

注意：AL值
◆单位：nH / N 2

◆测量条件：1kHz，0.3V，10Ts，25°C±3°C

◆公差：±25%（GH10，GH12：±30%）

以上产品的材质，可以根据客户的要求进行调整，我司可以供应GP4/GP44/GP47/GP95等材质。